


# Room Alert® 32W

NEW

“Advanced Physical Environment Monitoring,  
Alerting & Automatic Corrective Action  
w/Wireless Sensor Hub Monitoring”

NEW  
LOWER PRICE

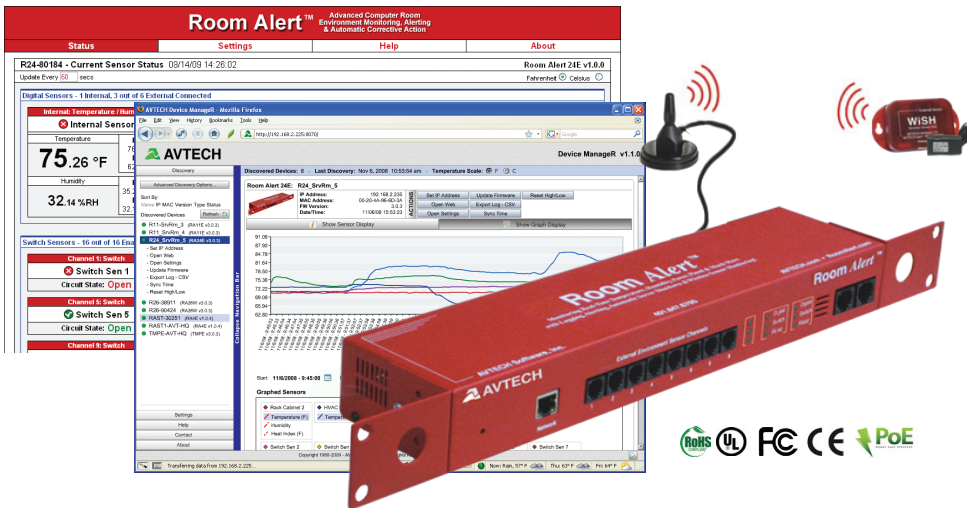

Order Now For...

**\$995**

RA32W-WS1-RAS



## The Ultimate In Physical Environment Monitoring...

- Easy Ethernet ‘Plug & Play’ setup for immediate IT & facilities environment monitoring with WIRELESS.
- Includes built-in sensors for digital temperature, digital humidity, heat index (feels like) and power.
- Includes Power Over Ethernet (PoE), a built-in Uninterruptible Power Supply (UPS), a Powered Wireless Sensor Hub (PWiSH), an external Digital Temperature Sensor and an external Room Entry Sensor.
- Includes ports for 8 digital sensors and 16 switch sensors or dry contacts, as well as additional ports to add relays, light towers, low voltage sensors and more.
- Offers advanced alerting by email, email-to-SMS, SNMP, webpage update and more.
- Use Room Alert 32W’s built-in web server, Device Manager software (*included FREE*) or any SNMP application to monitor unlimited units across your network.
- The Room Alert 32W package allows real-time sensor status, data logging, graphing, advanced alerting, Fahrenheit/Celsius, high/low watermarks and much more.
- Use the included ‘Windows Plugin Bundle’ with Device Manager to Shutdown or Reboot Windows systems, Log Off users and/or Run Scripts/Commands and more, remotely across the network.
- Use Room Alert 32W with or without a host system. That’s right... No PC Required! This saves money, improves reliability and provides options. Install in minutes today, enjoy ‘Peace Of Mind’ tonight!

**5 Steps To Prevent IT Disaster**  
1) Install Monitors for Immediate Detection  
2) Auto Alerting to Responsible IT Staff  
3) Auto Shutdown & Action Procedures  
4) Fast & Appropriate Response by Staff  
5) Review/Analyze/Plan Future Prevention

\* Includes rotating mounting wings for 1U rack, 0U wall, or standard.

120415

INCLUDES: Room Alert 32W Rack Unit (1U 19”), built-in Digital Temperature Sensor, built-in Digital Humidity Sensor, built-in Power Sensor, external Digital Temperature Sensor, external Room Entry Sensor, 8 external Digital Sensor Ports (RJ-11), 16 Switch Sensor Channels, Power On/Off Button, Factory Reset Button, 15 Wireless Sensor Hub capacity, Power Over Ethernet (PoE), LED Sensor Status & Wireless Strength indicators, WLAN, GSM Activity indicators, built-in Uninterruptible Power Supply (UPS), Wireless Sensor Hub (Powered), Ethernet Connection (RJ-45), 2 External Light Tower or Relay Switch Sensor Connection Ports (requires LTA adapter), 2 External Relay Output Ports (0.3A@125VAC / 1A@24VDC), 2 0-5V Analog Sensor Input Ports, External Antenna with 13’ Cable, 10’ Ethernet cable, 5V Power Adapter (110/240V, RoHS), built-in web server, SNMP Trap & Query enabled, bundled Device Manager software license, Windows Plugin Bundle (Unix/Linux alternative available if preferred), download access, printed *Room Alert 32W User’s Guide & Reference Manual*, 12 months of *Maintenance Support & Update Service (MSUS)*, ‘30-Day Satisfaction Guarantee’ and more.  
Additional sensors & optional software plugin packages available separately.